

# Gold Club ELECTRONIC ROULETTE



## GOLD CLUB, THE PREMIUM PLAYER EXPERIENCE

- The most compact electronic roulette allows to maximize return from limited spaces.
- Modern design with enhanced ergonomics.
- The Adaptive Illumination Technology ensures that the electronic roulette catches the players eye and stands out from anywhere on the casino floor.
- Gold Club™ use state-of-the-art design processes and only the best materials to ensure a long lifespan and high quality looks.
- WAP and LAP Jackpot Systems. Dynamic statistics.



winsysgroup.com


your global GAMING SOLUTIONS partner

WIGOS Gold Club GAMESTAR



Eurocoin Gaming  
van Liemptstraat 16  
5145 RB Waalwijk  
+31 885840010  
mail@eurocoingaming.nl

eurocoingaming.nl

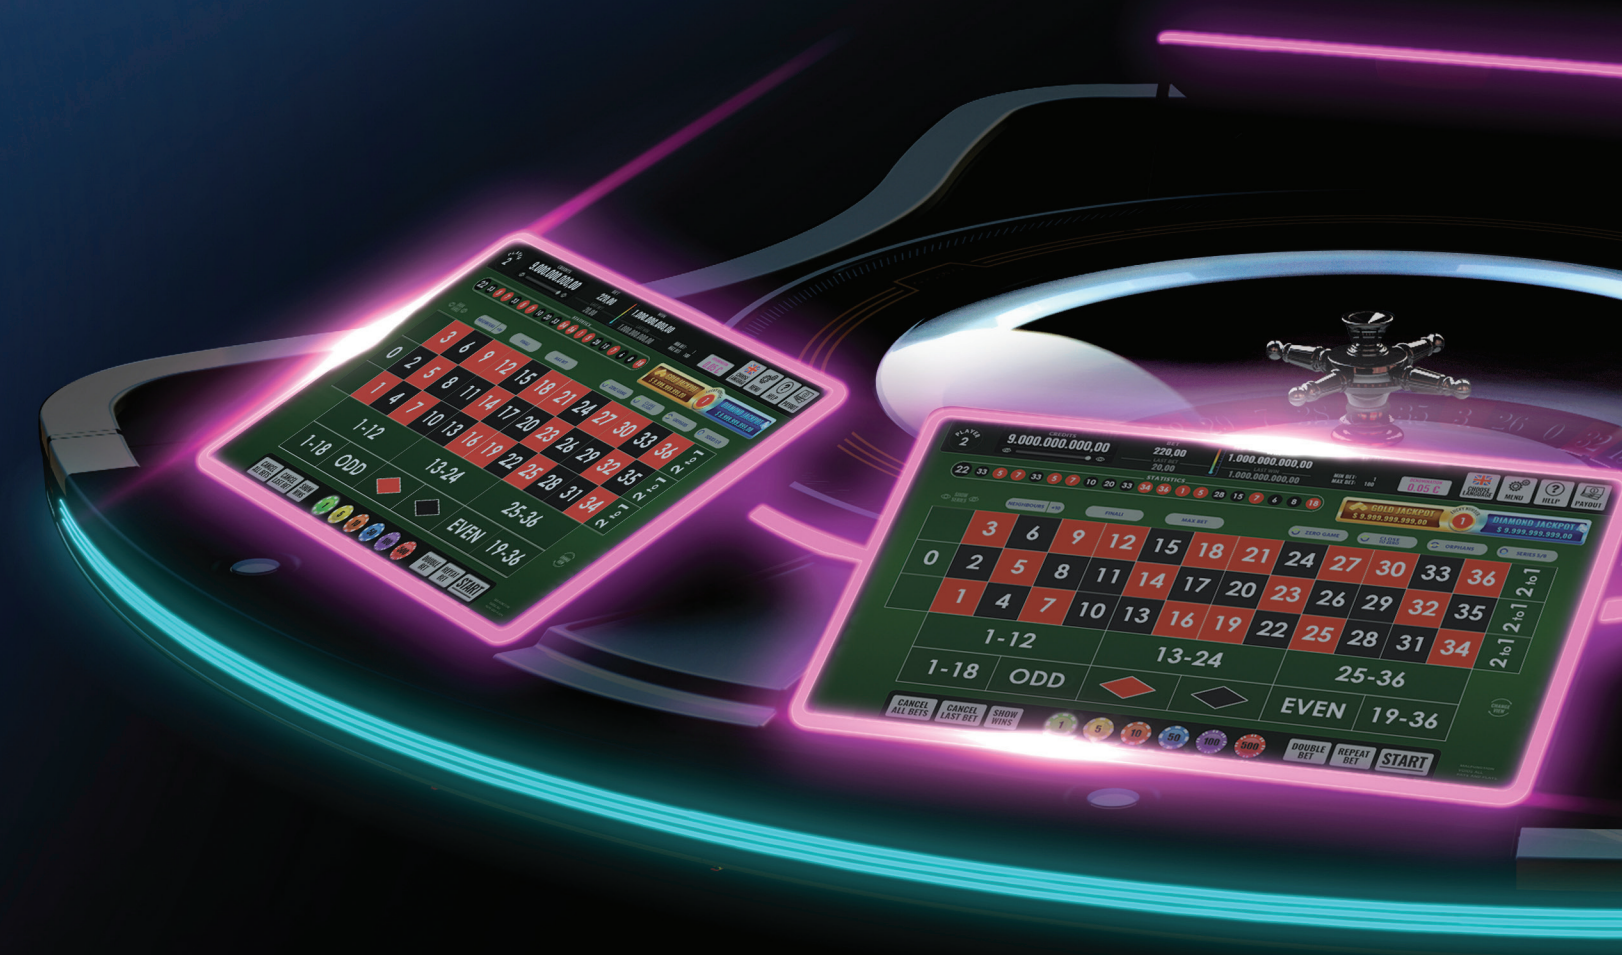

## Gold Club

**THE BEST PERFORMING**  
INTELLIGENT ELECTRONIC ROULETTE



QUADRA

Our most compact model to fit any space.  
4 player positions.



VENTURA

The perfect solution for venues of all sizes.  
6 player positions.



LUMINA

Compact and comfortable at the same time.  
8 player positions.



Gold Club



UNICA + iO

The most flexible market solution.  
Up to 255 player positions.

CHINESE ROULETTE



Chinese roulette is a game based on traditional roulette with 36 numbers plus zero. Playing field is in the form of the number 8, which is mystical in Chinese culture.



FUTURA

More room for more players  
10 player positions.



STATISTIC SIGN

LUCKY NUMBER

— Mystery progressive jackpot, multigame, 2 levels, LAP or WAP.

DYNAMIC STATISTICS

— Based on past 104 games, basic statistics, hot and cold numbers.



TECHNICAL DATA

	HOUSING	WIDTH	DEPTH	HEIGHT	WEIGHT	VOLTAGE
QUADRA						
	2+1 parts structure	1700 mm	1964 mm	1002 mm	560 kg	230 VAC/50 Hz 110 VAC/60 Hz
VENTURA						
	3+1 parts structure	2057 mm	2057 mm	1002 mm	600 kg	230 VAC/50 Hz 110 VAC/60 Hz
LUMINA						
	4+1 parts structure	2264 mm	2264 mm	1002 mm	680 kg	230 VAC/50 Hz 110 VAC/60 Hz
FUTURA						
	5+1 parts structure	2664 mm	2664 mm	1002 mm	890 kg	230 VAC/50 Hz 110 VAC/60 Hz
iO						
	1 part structure	700 mm	691 mm	964 mm	102 kg	230 VAC/50 Hz 110 VAC/60 Hz
UNICA						
	1 part structure	1130 mm	1130 mm	873 mm	165 kg	230 VAC/50 Hz 110 VAC/60 Hz
JACKPOT						
	3 parts	1294 mm	320 mm	2096 mm	100 kg	230 VAC/50 Hz 110 VAC/60 Hz